



ADSL2+ Access Module

32-Port ADSL2+ with POTS Splitters Access Module

Product Features

- Provides 32-ports of ADSL2+, ADSL2, READSL or ADSL
- 320 ports with integrated POTS splitters per Total Access 5000
- Full backwards compatibility with existing ADSL modems
- Software upgradeable to support pair bonding
- Supports separately configurable interface rates for upstream and downstream
- Onboard relays provide for metallic test access to the subscriber loops
- Supported by Total Access EMS
- Industry-leading 10-year warranty

The ADTRAN® Total Access® 5000 Multi-Service Access and Aggregation Platform can be configured to support a pure DSL overlay application. As an IP DSLAM, the Total Access 5000 is equally capable in Central Office, Remote Terminal and Remote Node locations, providing an economically scalable DSL overlay solution to meet the increasing broadband requirements of the next-generation network.

The ADTRAN Total Access 5000 ADSL2+ Access Module works in tandem with the Total Access 5000 SPLTR A2+ Access Module to deliver up to 32 individually configurable broadband ports per card. Although the ADSL2+ Access Module only takes up one slot in the Total Access 5000, the SPLTR A2+ Access Module is required, both to deliver services to the end customer and to provide subscriber access termination. The SPLTR A2+ Access Module functions as a host card for the ADSL2+ Access Module, allowing the data portion to be removed without interrupting POTS services.

Fully configurable to support ADSL2+, the Total Access 5000 ADSL2+ Access Module also supports standard fallback modes including ADSL2, RE ADSL2+, G.Lite and ADSL. Flexible

and configurable, the ADSL2+ Access Module allows operators to configure both upstream and downstream transmission rates or allows the interfaces to adapt to the best possible rates on the subscriber loop.

The Total Access 5000 ADSL2+ Access Module is supported by the Total Access 5000 Switch Module, offering VC to VLAN switching, allowing ATM-based ADSL traffic to be mapped directly into an IP network via Gigabit Ethernet.

Front panel LEDs include power, card status and loop status for each subscriber loop. The access modules support craft interface management via the Total Access 5000 System Controller Module (SCM). More comprehensive management is available using the Total Access Element Management System (EMS).

All provisioning data is supported through the SCM communications link. All provisioning data is stored in nonvolatile memory for recovery after a power loss and optional auto-provisioning is supported via the SCM.



ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35806

P.O. Box 140000
Huntsville, AL 35814-4000

256 963 8000 voice
256 963 8030 fax

General Information
800 9ADTRAN
info@adtran.com
www.adtran.com

**Pre-Sales
Technical Support**
888 5ADTRAN
support@adtran.com
www.adtran.com/support

Where to Buy
800 827 0807
www.adtran.com/where2buy

**Post-Sales
Technical Support**
800 726 8663
support@adtran.com
www.adtran.com/support

Regional Offices
Dallas, TX
972 830 9070
Denver, CO
303 471 9150
Kansas City, KS
800 471 8649
Newark, NJ
800 471 8656
Ontario, Canada
416 290 0585
Quebec, Canada
877 923 8726
San Antonio, TX
888 223 7671

International Inquiries
+1 256 963 8716 voice
+1 256 963 6300 fax
international@adtran.com
www.adtran.com/international



TL19.1270




ADTRAN is an ISO 9001, ISO 14001 and a TL 9000 certified supplier.

61187101E1-8A April 2011
Copyright © 2011 ADTRAN, Inc.
All rights reserved.

ADSL2+ Access Module

32-Port ADSL2+ with POTS Splitters Access Module

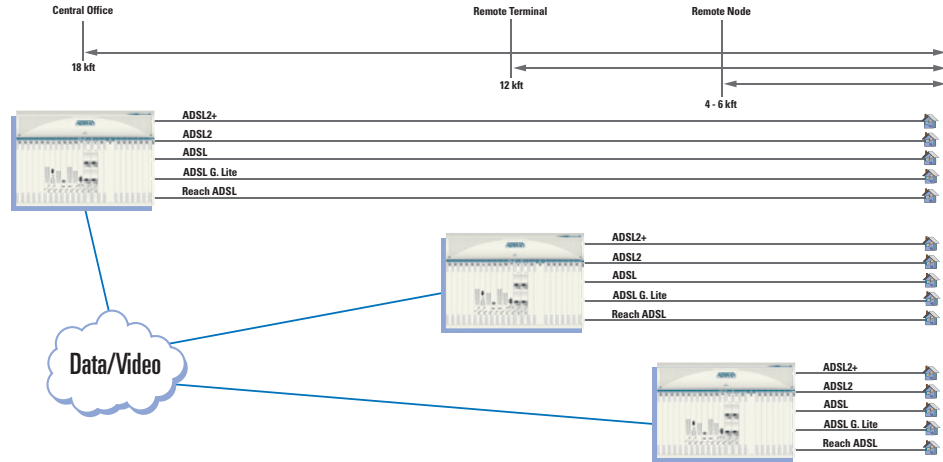

Product Specifications

Mechanical

- **Dimensions:** 9.25 in. H x 0.8 in. W x 9.25 in. D
- **Mounting:** SPLTR A2+ 32-Port access module slotted in even number slots; ADSL2+ 32-Port access module slotted in odd number slots

Interfaces

- **Network Interface:** via Switch Module
- **Subscriber Interfaces:**
 - ADSL2+ ITU G.992.5
 - ADSL2 ITU G.992.3/4
 - ADSL ITU G.992.1
 - ANSI T1.413-1998 Issue 2
 - ADSL G.Lite ITU G.992.2
 - READSL ITU G.992.5 Annex L
- **Physical Interface:** Requires AMIO2 CH64 PUSH THROUGH (P/N 1187450G1), Female CH64 connector for subscriber termination

Regulatory Standards

- NEBS Level 3
- GR-1089 CORE
- GR-63 CORE
- NRTL Listed
- FCC Part 15

Management

- Remote management through SNMP and TL1
- Ethernet interface for SNMP

Environmental

- **Operating Temperature:** -40°C to +65°C
- **Storage Temperature:** -40°C to +70°C
- **Relative Humidity:** Up to 95%, noncondensing

Ordering Information

Equipment	Part #
Total Access 5000 ADSL2+ 32-PORT AM	1187101E1
Total Access 5000 SPLTR A2+ 32-PORT AM	1187105L1
Total Access 5000 SPLTR A2+ 32-PORT AM	1187105L2

Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. All registered trademarks and trademarks mentioned in this publication are the property of their respective owners.