

Bluesocket

2030/2035

Dual Radio 802.11ac Access Point



Benefits

- 802.11a/b/g/n/ac wireless access points supporting MIMO antenna technology
- Dual radio 2.4 GHz and 5 GHz
- Full 3x3:3 MIMO performance
- Data rates up to 1.3 Gbps on 5 GHz radio and 450 Mbps on 2.4 GHz radio
- Fully functional with 802.3af (PoE)
- User configurable maximum-associated clients per radio
- Increased receive sensitivity for mobile devices with less transmit power
- “Zero-touch” AP deployment—APs automatically discover vWLAN, and download firmware and configurations
- Layer 7 Device Fingerprinting provides reporting and analytics of device types and device-specific policies
- Supports WMM/802.11e and QoS for Enterprise-class Voice over Wi-Fi
- DynamicRF Radio Resource Management Technology—automatically configures optimal radio settings to maximize performance
- DynamicSteering – Band/client steering, load balancing and sticky client prevention technology allows the Wi-Fi infrastructure to take charge making informed, coordinated, connectivity and roaming decisions
- Integrated wireless intrusion detection system to identify rogue access points and wireless attacks
- Supports stateful firewall for highest security at the edge

Overview

ADTRAN’s wireless portfolio includes a family of 802.11n and 802.11ac high-performance Access Points (APs) that are a perfect fit for enterprises of all sizes, including educational institutions, retail, hospitality, and healthcare providers who are looking to move their organizations to a pervasive mobility environment. Bluesocket® APs are completely plug-and-play requiring no manual configuration and deliver optimal performance. Whether you want to add wireless to your office or deploy across an entire campus, the Bluesocket APs are designed to meet your needs.

High-Performance, Reliable Connectivity

The Bluesocket 2030 and 2035 indoor APs offer enterprise-grade performance, with three transmit and three receive streams providing data rates up to 1.3 Gbps on the 5 GHz radio and 450 Mbps on the 2.4 GHz radio for a total of 1.75 Gbps. The Bluesocket 2030 AP includes six MIMO internal antennas with up to 5.5 dBi gain on the 5 GHz and 4 dBi gain on the 2.4 GHz. The Bluesocket 2035 AP includes six RP-SMA connectors for external antennas.

The Bluesocket 2030 and 2035 APs provide high performance, reliable coverage in ultra-high density wireless environments, such as indoor arenas, conference centers, libraries, and other high traffic

areas. The Bluesocket 2030s Series APs support the newer generation of laptops with three stream radio support, and offer higher receive sensitivity on both the 2.4 GHz and 5 GHz radios to compensate for Bring Your Own Device (BYOD) type mobile devices such as smartphones and tablets that have a fraction of the transmit power of traditional laptops.

The Bluesocket 2030 and 2035 APs are fully functional with the power delivered by a single port 802.3af PoE solution.

Flexible, Cloud-Managed Options

The Bluesocket APs operate in conjunction with ADTRAN’s flexible portfolio of cloud-managed deployment options including public cloud, private cloud or partner cloud with the freedom to migrate among them.

ADTRAN’s wireless solutions are built on Bluesocket virtual Wireless LAN (vWLAN), the industry’s premier cloud-managed wireless LAN. vWLAN® is simple yet powerful: simple in that it is intuitive, easy to learn, setup and use, and powerful with unmatched visibility, security, reliability, scalability and performance. In addition, ADTRAN’s ProServicesSM offer the most robust lifecycle professional services—from initial designs, to onsite surveys, to installations, all the way to end-user Help Desk.



BLUESOCKET 2030/2035

Deployments Made Simple—Auto Provision, Auto Configure, Auto Optimize

- **Zero-touch AP Deployment:** APs automatically discover vWLAN in the cloud, download firmware and download configuration.
- **Zero-IT Setup:** Enjoy a fully functional employee and guest network in minutes with just a few clicks and keystrokes.
- **DynamicRF:** Radio Resource Management (RRM) technology maximizes performance, adapts to interference, and provides seamless L2/L3 mobility by automatically setting channel and TX power settings, discovering neighbors and load balancing.
- **DynamicSteering:** Band/client steering, load balancing and sticky client prevention technology opens up a brand new dialogue between the Wi-Fi infrastructure and client devices allowing the Wi-Fi infrastructure to take charge making informed, coordinated, connectivity and roaming decisions from the vantage point of both the Wi-Fi infrastructure and the clients.

Unmatched Visibility and Insight

Cloud management allows you to view, manage and optimize the Wi-Fi® network from any device—anytime.

- **Customizable Reporting and Analytics Dashboards** provide realtime and historical business insight into the network.
- **Multi-tenant Support** enables centralized management of multiple customers or business entities from a single software instance.

Unsurpassed Security, Reliability, Scalability and Performance

- **Context-aware Access Control (with Layer 7 Device Fingerprinting)** allows for defining security policies based on users, device type, ownership, location and schedules. Businesses can now support BYOD or allow guest access while ensuring highest levels of network security.
- **Built-in Wireless Intrusion Detection (W-IDS)** to detect and isolate rogue access points in the network.
- **Built-in High-Availability (HA)** with zero packet loss failover ensures a reliable, always-on network.
- **Elastic Scalability** allows the network to quickly scale without the constraints of legacy hardware controllers.

Product Specifications

Interfaces

- One Auto-sensing, 10/100/1000Base-T, Serial Console Port, RJ-45 Connector

Antenna

- **Bluesocket 2030:** Six Internal MIMO Antennas with 5.5dBi Gain
- **Bluesocket 2035:** Six External RP-SMA Connectors

Radios

- 802.11a/n and 802.11b/g/n
- Configurable for Sensor-mode RF Scanning
- DynamicRF (Radio Resource Management) for Automatic Channel, TX Power and Neighbor Discovery
- DynamicSteering (Band/client steering, load balancing and sticky client prevention technology) with 802.11k/v support
- Configurable Maximum Associated Clients per Radio
- Multicast/Broadcast to Unicast Conversion

Dual Radio 802.11ac Access Point

- A-MPDU and A-MSDU Frame Aggregation
- HT20, HT40 (High Throughput) and VHT80 (Very High Throughput)
- *Max Aggregate TX Power
 - 2.4Ghz: 24 dBm/250 mW
 - 5Ghz: 26 dBm/400 mW

Certifications

- Wi-Fi 802.11a/b/g/n/ac Certification

Mobility Services

- Eight SSIDs Per Radio
- Support for Apple Bonjour-based Services (Airprint, Airplay), Apple CNA, and Microsoft NCSI
- Wireless Client Load Balancing
- Secure Fast Roaming with Opportunistic Key Caching (OKC)
- Seamless Layer 2 and Layer 3 Roaming
- High Availability
- Soft GRE tunneling
- 802.1Q VLAN Support

QoS for Voice, Data, and Video

- Smart Bandwidth Management (Incoming, Outgoing)
- WMM (802.11e)
- 802.1p or Differentiated Service Code Point (DSCP)
- WMM Power Save (U-APSD)

Security

- 802.1X Port-based Authentication
- Open System (WEP-64/128)
- Shared System (WEP-64/128)
- WPA/WPA2-Personal
- WPA/WPA2-Enterprise
- EAP-TTLS
- EAP-PEAP
- EAP-FAST
- EAP-TLS
- EAP-SIM
- EAP-AKA

Environment

- **Operating:** 32° F to 104° F (0° C to 40° C)
- **Storage:** 40° F to 158° F (-40° C to 70° C)
- **Humidity:** 5% to 90% Typical

*Aggregate of chains operating at 802.3at PoE or AC/DC power adapter. Max TX power may be limited by operating at 802.3af, local regulatory domains (country) and band edge requirements.

Physical

Bluesocket 2030 AP

- **Dimensions:** 6.5 in. x 6.5 in. x 1.5 in. (W x D x H) (165 mm x 165 mm x 35 mm)
- **Weight:** 1.25 lbs (0.6 kg)

Bluesocket 2035 AP

- **Dimensions:** 6.5 in. x 6.5 in. x 1.5 in. (W x D x H) (165 mm x 165 mm x 35 mm)
- **Weight:** 1.25 lbs (0.6 kg)

Power

- 802.3af Compliant Power over Ethernet
- External 12V DC Power Adapter (Optional)

Mounting

- Wall/Ceiling/T-bar Mount Kit Included
- Plenum Rated
- **Anti-Theft:** Compatible with Kensington-style Locks

Agency Approvals

Electrical/Safety Compliance

- UL 1950
- CSA 22.2
- IEC 60950
- EN 60950

Radio Approvals

- FCC Part 15.247
- RSS-210 (Canada)
- EN 300.328 (Europe)
- AS/NZS 4771 (Australia & New Zealand)
- NCC (Taiwan) and IDA (Singapore)
- EMI and Susceptibility (Class A)
- FCC Part 15.107 and 15.109
- ICES-003 (Canada)
- EN 301.489-1 and -17 (Europe)
- AS/NZS 3548


Warranty

- Limited Lifetime Warranty


BLUESOCKET 2030/2035

Antenna Patterns

BSAP 2030 – 2.4 GHz (5 dBi)

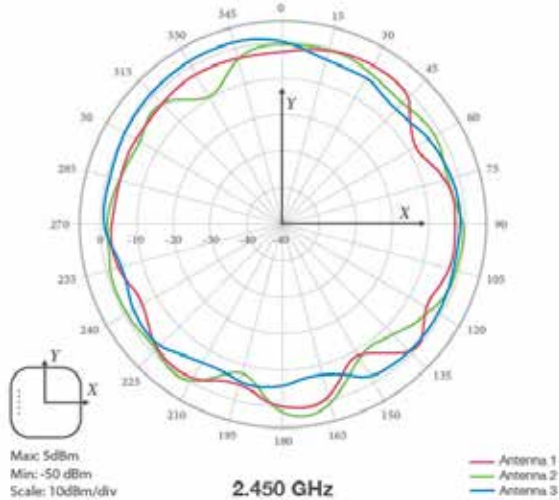


Horizontal or Azimuth (Top View)

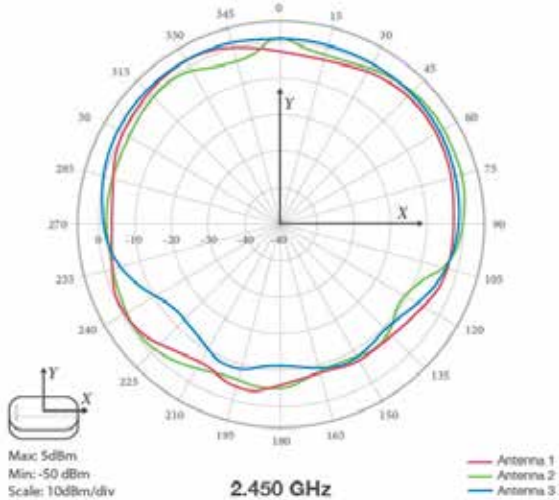


Elevation (Side View)

BSAP 2030 – 5 GHz (6 dBi)

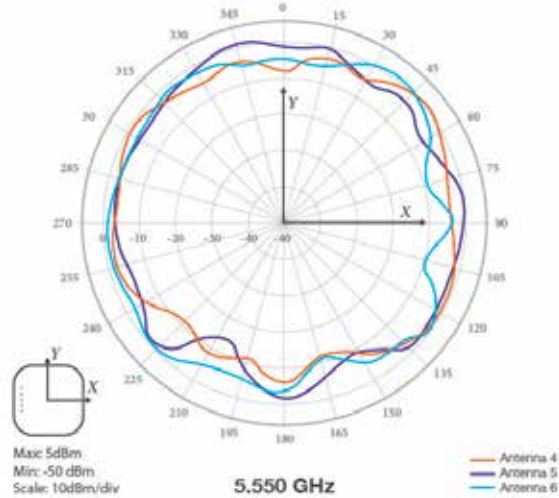

Horizontal or Azimuth (Top View)

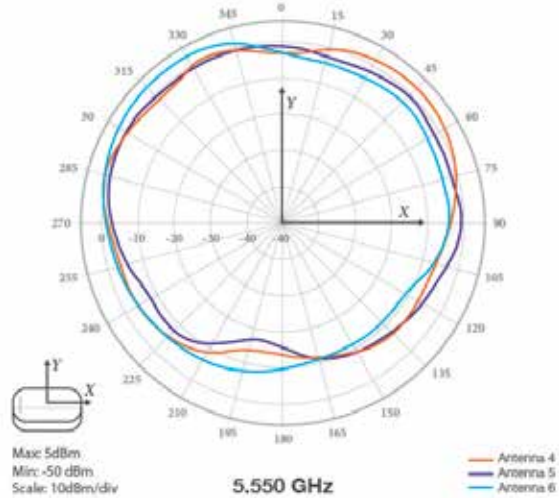

Elevation (Side View)

Dual Radio 802.11ac Access Point

Power and Sensitivity Tables

| | Max TX Power* | | Receive Sensitivity (Aggregate of Chains) | |
|-----------------------------|---|--------------------------|---|---------|
| | Operating at 802.3at PoE or AC/DC Power Adapter | Operating at 802.3af PoE | | |
| 802.11b 2.4 GHz | | | | |
| 1 Mbps | 24 dBm | 22 dBm | 1 Mbps | -93 dBm |
| 11 Mbps | 24 dBm | 22 dBm | 11 Mbps | -90 dBm |
| 802.11g 2.4 GHz | | | | |
| 6 Mbps | 24 dBm | 22 dBm | 6 Mbps | -92 dBm |
| 54 Mbps | 21 dBm | 19 dBm | 54 Mbps | -76 dBm |
| 802.11n 2.4 GHz HT20 | | | | |
| MCS0 | 23 dBm | 21 dBm | MCS0 | -90 dBm |
| MCS1 | 23 dBm | 21 dBm | | |
| MCS2 | 23 dBm | 21 dBm | | |
| MCS3 | 23 dBm | 21 dBm | | |
| MCS4 | 21 dBm | 19 dBm | | |
| MCS5 | 21 dBm | 19 dBm | | |
| MCS6 | 20 dBm | 18 dBm | | |
| MCS7 | 20 dBm | 18 dBm | MCS7 | -73 dBm |
| MCS8 | 23 dBm | 21 dBm | | |
| MCS9 | 23 dBm | 21 dBm | | |
| MCS10 | 23 dBm | 21 dBm | | |
| MCS11 | 23 dBm | 21 dBm | | |
| MCS12 | 21 dBm | 19 dBm | | |
| MCS13 | 21 dBm | 19 dBm | | |
| MCS14 | 20 dBm | 18 dBm | | |
| MCS15 | 20 dBm | 18 dBm | | |
| MCS16 | 23 dBm | 21 dBm | | |
| MCS17 | 23 dBm | 21 dBm | | |
| MCS18 | 23 dBm | 21 dBm | | |
| MCS19 | 23 dBm | 21 dBm | | |
| MCS20 | 21 dBm | 19 dBm | | |
| MCS21 | 21 dBm | 19 dBm | | |
| MCS22 | 20 dBm | 18 dBm | | |
| MCS23 | 20 dBm | 18 dBm | | |

*Aggregate of chains operating at 802.3at PoE or AC/DC power adapter. Max TX power may be limited by operating at 802.3af, local regulatory domains (country) and band edge requirements.

BLUESOCKET 2030/2035

Power and Sensitivity Tables

| | Max TX Power* | | Receive Sensitivity (Aggregate of Chains) | |
|-----------------------------|---|--------------------------|---|---------|
| | Operating at 802.3at PoE or AC/DC Power Adapter | Operating at 802.3af PoE | | |
| 802.11n 2.4 GHz HT40 | | | | |
| MCS0 | 22 dBm | 20 dBm | MCS0 | -88 dBm |
| MCS1 | 22 dBm | 20 dBm | | |
| MCS2 | 22 dBm | 20 dBm | | |
| MCS3 | 22 dBm | 20 dBm | | |
| MCS4 | 20 dBm | 18 dBm | | |
| MCS5 | 20 dBm | 18 dBm | | |
| MCS6 | 19 dBm | 17 dBm | | |
| MCS7 | 19 dBm | 17 dBm | MCS7 | -70 dBm |
| MCS8 | 22 dBm | 20 dBm | | |
| MCS9 | 22 dBm | 20 dBm | | |
| MCS10 | 22 dBm | 20 dBm | | |
| MCS11 | 22 dBm | 20 dBm | | |
| MCS12 | 20 dBm | 18 dBm | | |
| MCS13 | 20 dBm | 18 dBm | | |
| MCS14 | 19 dBm | 17 dBm | | |
| MCS15 | 14 dBm | 17 dBm | | |
| MCS16 | 22 dBm | 20 dBm | | |
| MCS17 | 22 dBm | 20 dBm | | |
| MCS18 | 22 dBm | 20 dBm | | |
| MCS19 | 22 dBm | 20 dBm | | |
| MCS20 | 20 dBm | 18 dBm | | |
| MCS21 | 20 dBm | 18 dBm | | |
| MCS22 | 19 dBm | 17 dBm | | |
| MCS23 | 19 dBm | 17 dBm | | |

*Aggregate of chains operating at 802.3at PoE or AC/DC power adapter. Max TX power may be limited by operating at 802.3af, local regulatory domains (country) and band edge requirements.

Dual Radio 802.11ac Access Point

Power and Sensitivity Tables

| | Max TX Power* | | Receive Sensitivity (Aggregate of Chains) | |
|------------------------------|---|--------------------------|---|---------|
| | Operating at 802.3at PoE or AC/DC Power Adapter | Operating at 802.3af PoE | | |
| 802.11a 5 GHz | | | | |
| 6 Mbps | 26 dBm | 24dBm | 6 Mbps | -89 dBm |
| 54 Mbps | 22 dBm | 20 dBm | 54 Mbps | -76 dBm |
| 802.11n/ac 5 GHz HT20 | | | | |
| MCS0 | 25 dBm | 23 dBm | MCS0 | -92 dBm |
| MCS1 | 25 dBm | 23 dBm | MCS1 | -88 dBm |
| MCS2 | 25 dBm | 23 dBm | MCS2 | -88 dBm |
| MCS3 | 24 dBm | 22 dBm | MCS3 | -85 dBm |
| MCS4 | 24 dBm | 22 dBm | | |
| MCS5 | 23 dBm | 21 dBm | MCS5 | -83 dBm |
| MCS6 | 22 dBm | 20 dBm | | |
| MCS7 | 21 dBm | 19 dBm | MCS7 | -73 dBm |
| MCS8 | 20 dBm | 18 dBm | MCS8 | -68 dBm |
| MCS9 | NA | NA | MCS9 | N/A |
| 802.11n/ac 5 GHz HT40 | | | | |
| MCS0 | 23 dBm | 21 dBm | MCS0 | -91 dBm |
| MCS1 | 23 dBm | 21 dBm | MCS1 | -85 dBm |
| MCS2 | 23 dBm | 21 dBm | MCS2 | -85 dBm |
| MCS3 | 23 dBm | 21 dBm | MCS3 | -80 dBm |
| MCS4 | 23 dBm | 21 dBm | | |
| MCS5 | 22 dBm | 20 dBm | MCS5 | -76 dBm |
| MCS6 | 21 dBm | 19 dBm | | |
| MCS7 | 20 dBm | 18 dBm | MCS7 | -71 dBm |
| MCS8 | 19 dBm | 17 dBm | MCS8 | -67 dBm |
| MCS9 | 19 dBm | 17 dBm | MCS9 | -66 dBm |
| 802.11ac 5 GHz VHT80 | | | | |
| MCS0 | 23 dBm | 21 dBm | MCS0 | -89 dBm |
| MCS1 | 23 dBm | 21 dBm | MCS1 | -84 dBm |
| MCS2 | 23 dBm | 21 dBm | MCS2 | -84 dBm |
| MCS3 | 23 dBm | 21 dBm | MCS3 | -79 dBm |
| MCS4 | 23 dBm | 21 dBm | | |
| MCS5 | 22 dBm | 20 dBm | MCS5 | -75 dBm |
| MCS6 | 21 dBm | 19 dBm | | |
| MCS7 | 20 dBm | 18 dBm | MCS7 | -68 dBm |
| MCS8 | 19 dBm | 17 dBm | MCS8 | -65 dBm |
| MCS9 | 19 dBm | 17 dBm | MCS9 | -63 dBm |

*Aggregate of chains operating at 802.3at PoE or AC/DC power adapter. Max TX power may be limited by operating at 802.3af, local regulatory domains (country) and band edge requirements.

Ordering Information

Choose Your Access Point

| Choose Your AP | Part No. |
|--|------------------|
| Indoor APs | |
| Bluesocket 2030: 802.11a/b/g/n/ac, 3x3:3, six internal MIMO antennas | 1700948F1 |
| Bluesocket 2035: 802.11a/b/g/n/ac, 3x3:3, six external RP-SMA connectors | 1700949F1 |

Choose Your Cloud

| Public Cloud - ProCloud | Part No. | Part No. |
|--|-----------------------|---|
| ProCloud for Indoor AP | | |
| NBD | NBD | 7x24x4 |
| One Year | 1100MSPH200112 | 1100MSPH300112 |
| Three Years | 1100MSPH200136 | 1100MSPH300136 |
| Five Years | 1100MSPH200160 | 1100MSPH300160 |
| Public Cloud - ProCloud Plus | | |
| ProCloud Plus for Indoor AP | | |
| NBD | NBD | 7x24x4 |
| One Year | 1100MSPM200112 | 1100MSPM300112 |
| Three Years | 1100MSPM200136 | 1100MSPM300136 |
| Five Years | 1100MSPM200160 | 1100MSPM300160 |
| Private Cloud | | |
| FREE vWLAN Virtual Appliance (VMware) (\$1995 value) | | Download Only (adtran.com/downloadvwan) |
| vWLAN 1U Rackmount Appliance (Hardware) | | 1700900F2 |
| vWLAN Desktop Appliance (Hardware) | | 1700918F1 |

Licenses

| Software License | |
|---|------------------|
| Licenses purchase waived while covered by ProCloud/ProCloud Plus | |
| FREE Access Point vWLAN Software License (\$235 value) | 1951901G1 |
| Access Point Unified User Access (Wired and Third-Party AP Support) Software License (Optional) | 1951910G1 |

Accessories

| Power Supply and Antennas | |
|--|------------------|
| 802.3af Compliant PoE Injector for BSAP 2030/2035 | 1700926F1 |
| AC/DC Power Adapter for BSAP 2030/2035 | 1700929F1 |
| Omnidirectional Antenna Bundle with 5 dBi gain for BSAP 2035 | 1700957F1 |
| Dual Band High Density Antenna Bundle with 13/7 dBi gain (2.4/5GHz respectively) for BSAP 2035 | 1700983F1 |



ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35806
256 963 8000

General Information
800 9ADTRAN
www.adtran.com/contactus

**Canada Headquarters—
Toronto, Ontario**
+1 877 923 8726
+1 905 625 2515
sales.canada@adtran.com

Canada—Montreal, Quebec
+1 877 923 8726
+1 514 940 2888
sales.canada@adtran.com

Mexico and Central America
+1 256 963 3321
+1 52 55 5280 0265 Mexico
sales.cala@adtran.com

South America
+1 256 963 3185
sales.brazil@adtran.com
sales.latam@adtran.com

6170094xF1-8H

November Copyright © 2016 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit www.adtran.com/exportlicense

ADTRAN
Certified
Supplier



ISO 9001
ISO 14001
TL 9000