

## Product Features

- True IP multi service access node
- Advanced service delivery - IPTV, POTS, ISDN, Business & Residential Ethernet, xDSL
- Carrier grade gateway between provider network and service subscriber
- Up to 108 Gbit/s Switching Capacity
- 14 Service Slots
- Identical service cards for all shelf-based hiX5600
- Copper and fibre transport and access
- Very high density for POTS and DSL access (up to 1008 ports per shelf)
- Redundant architecture (Control card, uplink, Bus, Power)
- Digital and metallic onboard test for voice and xDSL
- Supported by ACI-E EMS
- Temperature hardened (can be deployed in outside plant)
- Cabinet solutions available

# IP Multi-service Access Node

## hiX 5635

**The hiX 5635 is a high performance, carrier class IP multi-service access and aggregation node designed to ETSI standards.** It bridges the gap between the carrier IP network and the end subscriber for POTS, ISDN, VDSL, SHDSL, ADSL, Fast Ethernet, GbE, IPTV and other services.

The hiX 5635 is built upon a pure IP core and supports both legacy and emerging service interfaces over copper and fiber. This mix of services on one platform enables service providers to future proof their networks. New services can be deployed with the simple change of a line card, equipment obsolescence can be avoided and network investments protected.

The chassis supports fourteen service slots enabling the system to deliver up to 1008 ports making it ideal for large and mid-size applications at the Central Office or deep in the network. Service slots include ADSL2+ (72 ports/slot), POTS (VoIP capable, 72 ports/slot), VDSL2 (48 ports/slot), ISDN (32 ports/slot), GbE (10 ports/slot), Fast Ethernet (48 ports/slot) and more. With the 10 GB capable redundant star backplane architecture, the hiX 5635 provides high capacity and high reliability in one system. This is complemented by redundant central control cards, redundant 1 GbE or 10GE uplinks on the central control card and redundant power supplies making the hiX 5635 truly carrier grade.

The system provides voice and data services as well as a simple migration path from legacy interfaces to IP. Voice services can be transitioned from POTS or ISDN to VoIP for example. Broadband data access can be provided using SHDSL, ADSL or VDSL (with or without splitters) as well as high density fibre using Fast Ethernet or Gigabit Ethernet. This unique mix of services from one single IP based platform enables service providers to quickly adapt to new business opportunities and remain highly competitive.

In order to ensure maximum flexibility, the common equipment and line cards are temperature hardened allowing the system to be deployed virtually anywhere, ranging from the Central Office to compact outdoor cabinets.

The hiX 5635 is managed by ADTRAN's Access Integrator Ethernet (ACI-E) Element Management System. The ACI-E EMS and hiX 5635 nodes communicate using SNMP via in-band or out-band channels. The ACI-E provides a Graphical User Interface (GUI) and northbound interfaces such as SNMP, TMF CORBA, WSPI (Web service based XML provisioning I/F) for a smooth integration into service provider operational systems.



**ADTRAN, Inc.**  
**International Department**  
**U.S. Headquarters**  
 901 Explorer Boulevard  
 Huntsville, Alabama 35806  
[www.adtran.com](http://www.adtran.com)  
 +1 256 963 8000  
 +1 256 963 6300 fax  
[international@adtran.com](mailto:international@adtran.com)

**International Customer Service**  
 +1 256 963 8716

**Asia—Beijing, China**  
 +86 10 8527 5011  
 +86 10 8527 5010 fax  
[sales.china@adtran.com](mailto:sales.china@adtran.com)

**Asia—Hong Kong**  
 +852 3187 7111  
 +852 2116 4084 fax  
[sales.asia@adtran.com](mailto:sales.asia@adtran.com)

**Asia—Bangkok, Thailand**  
 +66 2 610 3724  
 +66 2 610 3601 fax  
[sales.asia@adtran.com](mailto:sales.asia@adtran.com)

**Asia—Singapore**  
 +65 6232 2305  
 +65 6232 2888 fax  
[sales.asia@adtran.com](mailto:sales.asia@adtran.com)

**Australia/New Zealand—  
 Melbourne, Australia**  
 +61 3 9658 0500  
 +61 3 9658 0599 fax  
[sales.australia@adtran.com](mailto:sales.australia@adtran.com)

**Australia/New Zealand—  
 Sydney, Australia**  
 +61 2 8456 0101  
 +61 2 8456 0105  
[sales.australia@adtran.com](mailto:sales.australia@adtran.com)

**Canada Headquarters—  
 Toronto, Ontario**  
 +1 877 923 8726  
 +1 514 989 3198 fax  
 +1 905 625 2515  
 +1 905 625 2511 fax  
[sales.canada@adtran.com](mailto:sales.canada@adtran.com)

**Canada—Montreal, Quebec**  
 +1 877 923 8726  
 +1 514 940 2888  
 +1 514 989 3198 fax  
[sales.canada@adtran.com](mailto:sales.canada@adtran.com)

**European Regional  
 Headquarters—United Kingdom**  
 +44 (0) 1189 317080  
[sales.europe@adtran.com](mailto:sales.europe@adtran.com)

**MEA Headquarters—  
 Middle East and Africa**  
 +971 2622 8007  
 +971 2622 8024 fax  
[sales.mea@adtran.com](mailto:sales.mea@adtran.com)


**Mexico and Central America**  
 +1 256 963 3321 U.S.  
 +1 52 55 4525 1633 Mexico  
[sales.mexico@adtran.com](mailto:sales.mexico@adtran.com)

**Caribbean and Latin America**  
 +1 256 963 4177 U.S.  
[sales.cala@adtran.com](mailto:sales.cala@adtran.com)  
 +1 256 963 4177 U.S.  
[sales.caribbean@adtran.com](mailto:sales.caribbean@adtran.com)

+1 256 963 9185 U.S.  
 +1 55 19 2512 0661 Brazil  
[sales.brazil@adtran.com](mailto:sales.brazil@adtran.com)

# IP Multi-service Access Node

## hiX 5635

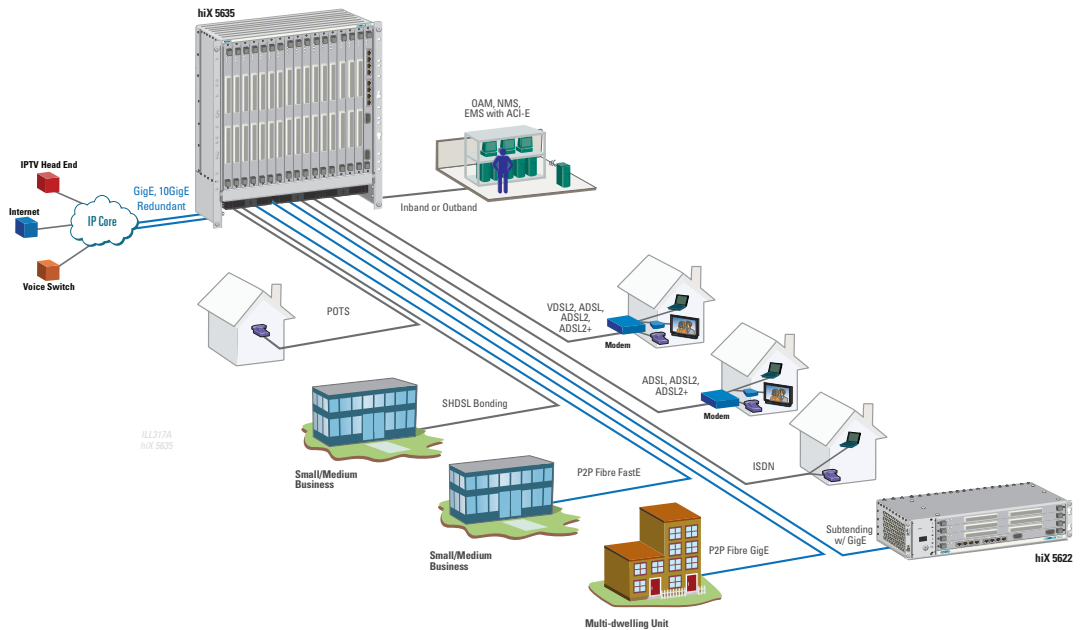

## Product Specifications

### Physical

- **Dimensions:** 536 mm H, 482 mm W, 331 mm D including cables and ETSI adapters

### Interfaces

- **Maximum number of slots:** 17
- 14x service-units, 2 x central units
- 1x power module (1/2 slot size),
- 1x power module (optional for redundancy)

### Electrical

- **DC Power:** -40,5 to -72VDC
- **Power connector:** 3W3 male
- **Power consumption maximum:** 1800W

### Regulatory Standards

- ETSI EN 300 019
- ETS 300 753
- DTAG TS 0364/96
- ETSI EN 300 386
- DTAG 1TR9
- ETS ES 201 468
- ETSI EN 60950
- ITU-T K.20/21/27/31/35/45

### Environmental

- **Operating temperature indoor:** -25°C to +55°C
- **Operating temperature outdoor shelter:** -25°C to +70°C
- **Storage:** -45°C to +45°C
- **Transport:** -40°C to +70°C
- **Relative Humidity:** up to 100%, non-condensing

## Ordering Information

Equipment	Part #
hiX 5635 Chassis 19" ETSI (G1100 2G)	S50028-B3102-A1
hiX fan unit large w/o dust filter (<70°C)	S50028-B2104-A2
hiX fan unit large w/dust filter (<45°C)	S50028-B2104-A4
hiX filter pad for dust filter	C50165-A230-C419
Adapter kit (unsymmetric 19" to 21")	C50165-A230-B131
Adapter kit (symmetric 19" to 21")	C50165-A230-B211

### Commons

Central units, interface units and power modules are described in separate data sheets.

ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN is a registered trademark of ADTRAN, Inc. and its affiliates in the U.S. and certain other countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exporthlicense](http://www.adtran.com/exporthlicense)

ADTRAN is an ISO 9001 and ISO 14001 certified supplier.  
 161132009G1-8D July  
 Copyright © 2012 ADTRAN, Inc.  
 All rights reserved.