

# ADTRAN 508VP

## MDU GPON Outdoor ONU

### Product Features

- Fully sealed enclosure for go-anywhere deployment flexibility
- Passive cooling for completely silent operation in residential deployments
- Integrated lightning survivability eliminates external protection boxes
- Ultra-low total cost of ownership for triple-play service delivery
- Provides 8 ports of vectored VDSL2 and POTS
- IGMPv2 and v3lite proxy with Mediaroom support
- IPv6/DHCPv6, LDRA capable
- Voice signaling via GR-303, TR-08, TR-57, SIP, and MGCP
- Single fiber GPON backhaul
- Supports EFM bonding for greater bandwidth and reach
- Span powered for reliability and low installation cost
- Supports separately configurable interface rates for upstream and downstream
- Flexible traffic management including policing and shaping
- Provisioned from the OLT via OMCI for ease of provisioning and deployment
- Supported by Advanced Operational Environment (AOE) service management



**The key to customer retention and continued revenue growth is to offer new, higher bandwidth services to your customers.** The ADTRAN® 508VP Optical Network Unit utilizes Vectored VDSL2 to allow service providers to realize ultra-broadband speeds over their existing copper infrastructure, economically delivering broadband connections to the home and enabling advanced communications and entertainment services.

The ADTRAN 508VP ONU provides a flexible approach to the successful deployment of broadband data and voice services in a variety of applications. Fed with GPON and supporting up to eight subscribers with high-speed vectored VDSL2 data and eight analog POTS service, the 508VP is ideal for deep fiber deployments to the curb, building, home or distribution point, Multi-dwelling Unit (MDU), and other applications where advanced services are required for a small number of subscribers.

The 508VP is a perfect fit for MDUs in GPON Fiber to the Home (FTTH) deployments. It is a potent GPON ONU which can be installed in a basement, crawlspace, or on an interior or exterior wall to provide IPTV, ultra high-speed (100 Mbps+) data, and voice services to the subscribers inside over the existing in-building copper infrastructure. Services can be deployed rapidly over existing in-building wiring and with minimal installation and construction costs. Combining the ability to be deployed in any environment with dramatically lower deployment costs, the 508VP allows carriers to cost-effectively reduce loop lengths and maximize the performance of VDSL2 for every subscriber in their copper network.

The solution is purpose-built for the emerging Fibre-to-the-Distribution Point or Building architectures (FTTdp or FTTB). Its fully sealed housing makes the 508VP ONU a robust and reliable network element that can be deployed in pedestals, poles, low-profile “doghouse” enclosures, and even underground vaults and hand-holes. ADTRAN FTTdp and FTTB architecture can be operationally aligned with FTTH architectures—as a FTTH extension cord. This is because, unlike other DSL acceleration solutions, these FTTdp solutions can be managed (OMCI) and subtended (GPON) just as a FTTH ONT would be. Service providers can leverage their existing fiber infrastructure while updating the electronics to provide state-of-the-art 100 Mbps+ vectored VDSL2 services to retain existing customers or win back those lost to competing technologies.

In any network, there are locations where the number of subscribers within a given serving area cannot profitably support the installation of traditional cabinet-based broadband access equipment, or even higher-density outside plant equipment like members of the Total Access® 1100 Series. The 508VP can prove in the business case in these areas and enable advanced service delivery to those subscribers rather than ceding them to a competitor.

The ADTRAN 508VP ONU works seamlessly with ADTRAN’s widely deployed Total Access 5000 Series Multiservice Access and Aggregation Platform. Functioning as a highly capable GPON OLT and flexible carrier class access platform, the Total Access 5000 bridges the gap between existing and next-generation network architectures like Active Ethernet and GPON. It makes a carrier’s access network capable of meeting a variety of legacy and emerging system requirements. Its Ethernet architecture allows carriers to increase bandwidth while offering differentiated capabilities. Coupled with the 300 and 400 series ONTs and the 508VP ONU, this provides an end-to-end FTTP deployment strategy that is supported by a common management solution.

The 508VP GPON MDU ONU leverages the industry-leading converged voice and data functionality widely deployed in ADTRAN integrated access, IP gateway, and Voice over IP (VoIP) platforms, with millions of ports currently deployed. The ONU provides unmatched SIP and MGCP interoperability with a host of major softswitch vendors, as well as integrated statistics and tools that allow carriers to quickly and easily troubleshoot network configuration issues, as well as monitor performance.

This outdoor ONU provides a flexible solution that allows service providers to economically meet their most challenging objectives. With the ability to economically deliver ultra-broadband services using field-proven outside plant technology, aligned with emerging FTTdp architectures, this MDU Outdoor ONU is ready for the broadband demands of the future.



**ADTRAN, Inc.**  
 901 Explorer Boulevard  
 Huntsville, AL 35806  
 P.O. Box 140000  
 Huntsville, AL 35814-4000  
 256 963-8000  
 256 963-8699 fax

**General Information**  
 800 9ADTRAN  
 info@adtran.com  
 www.adtran.com

**Pre-Sales Technical Support**  
 888 423-8726  
 application.engineer@adtran.com  
 www.adtran.com/presales

**Post-Sales Technical Support**  
 888 423-8726  
 support@adtran.com  
 www.adtran.com/support

**Where to Buy**  
 888 423-8726  
 channel.sales@adtran.com  
 www.adtran.com/where2buy

**ProServices<sup>SM</sup>**  
 888 874-2237  
 proservices@adtran.com  
 www.adtran.com/proservices

**Global Inquiries**  
 256 963-8000  
 256 963-6300 fax  
 international@adtran.com


ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty)

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense)

# ADTRAN 508VP

## MDU GPON Outdoor ONU

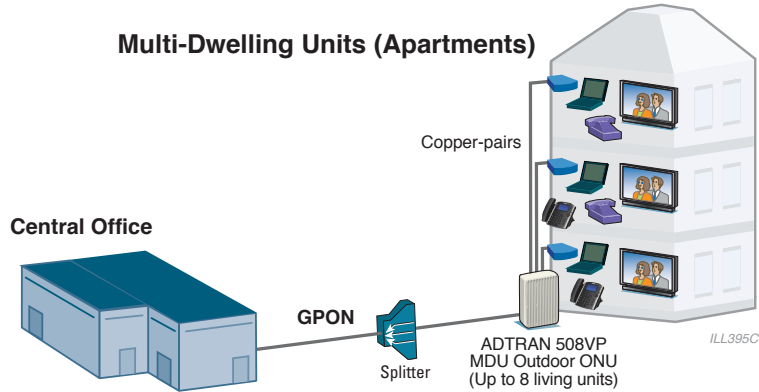

## Product Specifications

### Mechanical

- **Dimensions:** 17.3 in. x 10.0 in. x 3.3 in. (H x W x D) (43.9 cm x 25.4 cm x 8.4 cm)
- **Weight:** 16 lbs (7.3 kg)
- **Outdoor Mounting:** Pedestal, wall, handhole, doghouse

### Interfaces

#### Network

- Single-fiber GPON (ITU-T G.984, 2.5 Gbps downstream, 1.2 Gbps upstream)
- Integrated 5-foot fiber tail with SC termination

#### Subscriber

- 8 VDSL2 + 8 POTS with integrated primary protection
- Integrated 5-foot copper tail with 710 termination

### Ethernet Services

- 802.1D bridging
- Virtual switch based on 802.1q VLAN
- VLAN tagging/detagging per Ethernet port
- VLAN stacking (Q-in-Q) and VLAN translation
- Class of Service based on VLAN-ID, 802.1p bit
- Marking/remarking of 802.1p
- IGMP v2 and v3lite snooping

### DSL Performance

- VDSL2 5-Band Profile 8a-d, 12a-b, 17a
- ADSL2+ ITU-T G.992.5
- ADSL2 ITU-T G.992.3/4
- ADSL ITU-T G.992.1; ANSI T1.413-1998 Issue 2
- ADSL G.Lite ITU-T G.992.2
- READSL ITU-T G.992.5 Annex L
- G.vector ITU-T G.993.5

### POTS Performance

- **Loop Reach:** 1560Ω including handset

#### Signalling Modes

- Loop Start
- Ground Start

### Power

- **Line Power:** Up to 2 line-powering pairs (+/- 190 VDC per pair)

### Regulatory Standards

- GR-487-CORE, Issue 2
- NEBS Level 3
- GR-1089-CORE, Issue 3
- GR-63-CORE, Issue 2
- UL 60950-1/21/22
- FCC Part 15
- RoHS 6 of 6 Compliant

### Environmental

- **Operating Temperature:** -40° F to +158° F (-40° C to +70° C)
- **Storage Temperature:** -40° F to +185° F (-40° C to +85° C)
- **Relative Humidity:** 100%, condensing

## Ordering Information

Equipment	Part No.
ADTRAN 508VP MDU GPON Outdoor ONU	1179870F1



TL19.1270



ADTRAN is an ISO 9001, ISO 14001, and a TL 9000 certified supplier.

61179870F1-8C April  
 Copyright © 2014 ADTRAN, Inc.  
 All rights reserved.