



ADTRAN

# 1116VXP/VXP-DMT

## 16-Port Sealed FTTN with Built-in POTS

(optional EoDMT Backhaul)



VDSL2



Vectoring



POTS



Sealed



Low TCO

## Benefits

- Environmentally sealed, temperature hardened standalone Vectored VDSL2 FTTN solution enables rapid deployment of ultra-broadband and CAF services
- Built-in POTS, supporting up to 16 subscribers; voice signalling via TDM voice (GR-303/TR-08) and VoIP (MGCP/SIP)
- Built-in EoDMT link supports bonded copper uplinks (1116VXP-DMT)
- Delivers 100 Mbps up to 3000 feet from the node using bonded VDSL2 with vectoring
- Extends 25/3 DSL services up to 18K feet for CAF applications
- Provides silent operation and low profile construction abiding by strict residential zoning rules
- Supports IPTV video service
- Can be mounted on pole, pedestal, cross-box or remote terminal delivering ultra-low Total Cost of Ownership (TCO)
- Supports two GigE or 10GigE uplinks
- Reduces installation cost via flexible powering options (span, AC and DC powering)

## Overview

### Accelerating Gigabit Services

The growing demand for broadband services is fueling the need for pushing fiber deeper into the network and closer to the end user. However, the cost of delivering Fiber-to-the-Home (FTTH) can be both cost prohibitive and time-consuming, particularly in remote and rural locations. Broadband technologies such as bonded and vectored VDSL2 allow service providers to utilize existing copper infrastructure in combination with sealed Fiber-to-the-Node (FTTN) solutions to cost-effectively deliver ultra-broadband (100+ Mbps) and IPTV services to subscribers in all areas.

### Faster Time-to-Market

The ADTRAN® 1116VXP and 1116VXP-DMT are compact, sealed, FTTN solutions that allow service providers to realize ultra-broadband speeds with their existing copper infrastructure, economically delivering 100 Mbps+ broadband services to the home using vectored VDSL2.

ADTRAN designed the standalone, weatherproof 1100 Series FTTN systems to be mounted on a pole, pedestal, cross-box, remote terminal or other challenging locations, eliminating the need for expensive cabinet enclosures, heat exchangers and site construction. This allows for ultra-broadband services deployment within days, instead of months, dramatically lowering deployment costs.

### Support Existing Lifeline POTS

The 1116VXP/VXP-DMT also supports delivery of lifeline POTS services with ultra-broadband (100+ Mbps) services, and provides 16 POTS interfaces to support 16 subscribers. The subscriber interface is traditional analog POTS, but the 1116VXP/VXP-DMT POTS converts each signal to an RFC 3550 IP-packet, allowing voice traffic to be carried across the same Ethernet transport architecture. The 1116VXP/VXP-DMT also supports SIP and MGCP for native Voice-over-IP (VoIP).

### Extend Reach of Broadband Services

Equipped with eight-pair bonded for copper backhaul, a non-blocking architecture, and a rich, carrier-based feature set targeted for the delivery of multimedia services, the 1116VXP-DMT is ideally suited for ultra-broadband service delivery in difficult to serve locations. The 1116VXP-DMT FTTN solution extends the delivery of 100 Mbps data and IPTV services by using bonded VDSL2 with vectoring. The ability to use either fiber or copper (bonded VDSL2) for uplinks allows carriers to deploy the 1116VXP-DMT to expand service in remote or rural areas using eight-pair bonded copper as backhaul. The EoDMT uplink also supports vectoring for increased upstream backhaul bandwidth to the aggregator.

The 1116VXP-DMT is a future-proof solution with two 10GigE uplinks that allow upgradeability to faster 10GigE fiber backhaul to deliver higher broadband speeds and enhance customer satisfaction.

# 1116VXP/1116VXP-DMT


## Cost-Effectively Expand Footprint

Integrated 10G switching in the 1116VXP/VXP-DMT Host units enables daisy-chaining multiple 1116VXPs to support a growing number of subscribers. This accommodates long-term growth and lowers initial circuit costs. Ethernet Ring Protection Switching (ERPS) support enables resilient connection of multiple nodes while minimizing aggregation port cost. Integrated splitters and primary protection eliminate the need for extra equipment and provide the absolute smallest footprint for the 1116VXP/VXP-DMT Vectored VDSL2 system.

## Lower Operation and Maintenance Costs

The 1116VXP/VXP-DMT comes with customer-accessible cables that allow for the quick replacement of units in the field. Several cable lengths with MS2 or 710 type connectors or unterminated stub are available to accommodate the needs of all service providers. The 1116VXP/VXP-DMT can be remotely provisioned and managed using TL1, Telnet, SNMP, or the Advanced Operational Environment (AOE) management suite, enabling service providers to operate the unit without a truck dispatch.

RFT-V span and -48 VDC local powering options are offered. Span powering from the central office allows for the centralization of battery backup and greatly reduces deployment costs. The 1116VXP/VXP-DMT uses one to eight powering pairs from the central office with the actual pair count dependent on the desired deployment range.

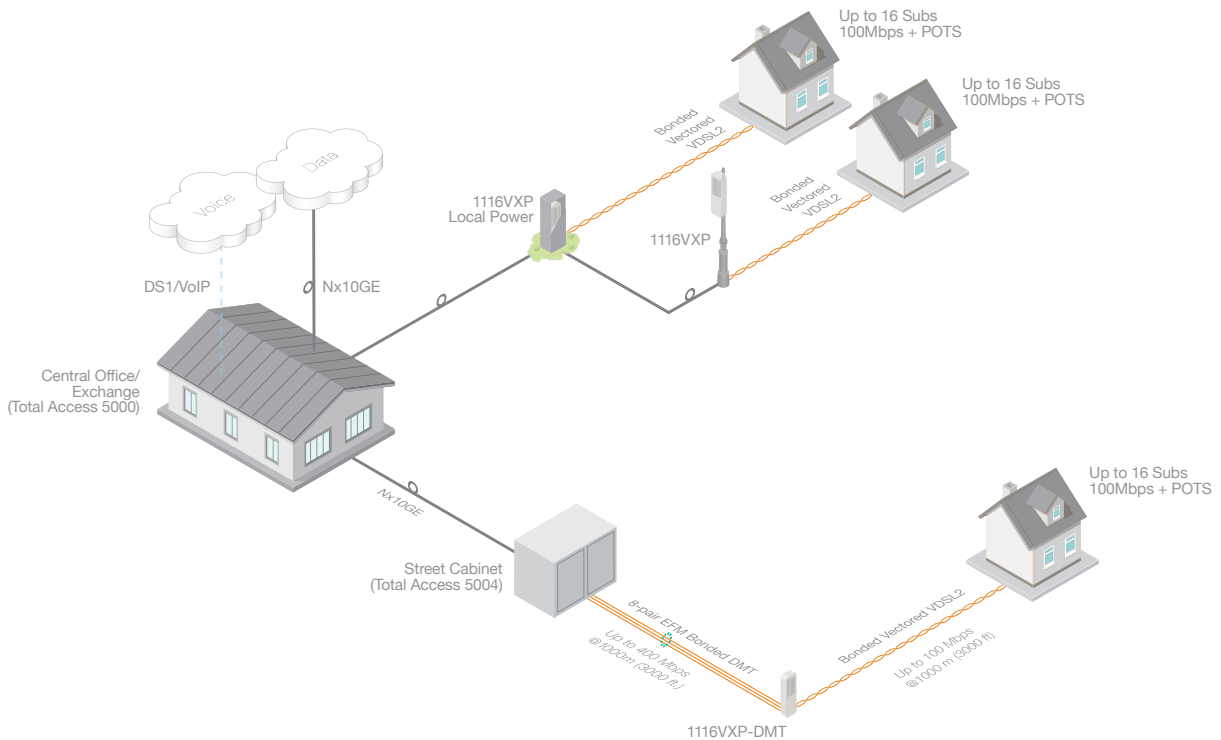

# 16-Port Sealed FTTN with POTS (optional EoDMT)

## PRODUCT SPECIFICATIONS

### Mechanical

- **Dimensions:** 19.7" x 10" x 3.9"  
(500mm x 255mm x 98mm) (H x W x D)
- **Weight:** 15lbs (<7kg)
- **Outdoor Mounting:** Pole, Pedestal, Cross-box, Remote Terminal, other challenging locations

### Mechanical

#### Access

- 16 subscriber ports of Vektored VDSL2 for high speed internet.
- Integrated Splitters and built-in POTS support voice service delivery
- Well-suited for 100Mbps services delivery

#### Network

- Two 1/2.5/10GE SFP+ Interfaces
- Resilient Ethernet Ring per ITU-T G.8032 (ERPS)
- Up to eight-pair bonded EoDMT backhaul (1116VXP-DMT)

#### DMT Specifications

- **Modulation Type:** Discrete Multi-Tone (DMT)
- **Mode:** Full Duplex, Non-overlapped
- **Standards:** T1.413;G.992.1 Annex A; G.992.2 Annex A; G.992.3; G.992.4; G.992.5
- **Number of Pairs (DSL plus POTS):**  
16 (one per loop)
- **Downstream Data Rate:**
  - ◆ ADSL2: Up to 96 Mbps
  - ◆ ADSL2+: Up to 192 Mbps
  - ◆ VDSL: Up to 600 Mbps
- **Upstream Data Rate:**
  - ◆ ADSL: Annex A mode – up to 9 Mbps
  - ◆ ADSL2+: Annex M mode – up to 18 Mbps
  - ◆ VDSL: Up to 300 Mbps
- **DSL Service Range:** 18,000 feet (5.5 km)

### DSL Standards

- ITU G.993.2 (VDSL2)
- ITU G.992.3 (ADSL2)
- ITU G.992.5 (ADSL2+)
- ITU G.993.5 (G.vector)
- G.998.1 (ATM Bonding)
- G.998.2 (EFM Bonding)

### VDSL2 Profiles and PSDs

- Profiles 8a-d, 12a-b, 17a
- Annex A and Annex B PSDs

### POTS Performance

#### Signaling Modes

- Loop Start
- Ground Start

#### Impedance

- 600  $\Omega$
- 900  $\Omega$  + 2.16  $\mu$ F
- 220  $\Omega$ + (820  $\Omega$  // 115 nF)
- 270  $\Omega$  + (750  $\Omega$  // 150 nF)
- 270  $\Omega$  + (750  $\Omega$  // 150 nF),  $Z_{in}$  = 600  $\Omega$
- 320  $\Omega$  + (1050  $\Omega$  // 230 nF)
- 350  $\Omega$  + (1000  $\Omega$  // 210 nF),  $Z_{in}$  = 600  $\Omega$
- 370  $\Omega$  + (620  $\Omega$  // 310 nF)
- 800  $\Omega$  // (100  $\Omega$  + 50 nF)
- 1650  $\Omega$  // (100  $\Omega$  + 5 nF),  $Z_{in}$  = 900 + 2.16  $\mu$ F
- Loop Reach: 1560  $\Omega$  Including Handset

### Ethernet Services Support

- Single Stack VLAN and Double Stack VLANs
- (Q-in-Q) Manipulation
- Flexible Traffic Classification
- Ingress Policing and Egress Shaping
- IGMP Snooping and Proxying

### IPTV Services Support

- Internet Group Management Protocol v2 and v3
- Dynamic Host Configuration Protocol Support with Option 82

### Security

- Management AAA via RADIUS and TACACS+
- SSHv1/v2, SFTP, and HTTPS

### Management

- **Local:** Local Craft Interface (DB9, USB Type B)
- **Remote:** TL1, Telnet, SNMP, Advanced Operational Environment (AOE) Management Suite

### Environmental

- **Operating Temperature:** -40° F to 149° F  
(-40° C to +65° C)
- **Storage Temperature:** -40° F to 285° F  
(-40° C to +85° C)
- **Relative Humidity:** 95%, Non-Condensing
- **Environmentally Hardened**—Fully Sealed, Watertight

# 1116VXP/1116VXP-DMT

## PRODUCT SPECIFICATIONS (continued)

### Power

- **Local DC Power:** –48 VDC
- **Line Power:** 1 to 8 Line-Powering Pairs (+/- 190 VDC per pair)

### Regulatory Standards

- GR-487-CORE, Issue 4
- NEBS Level 3
- GR-1089-CORE, Issue 6
- GR-63-CORE, Issue 4
- UL 60950-1/22
- RoHS Compliant
- FCC Part 15

## ORDERING INFORMATION

Equipment	Part No.
1116VXP HOST	1179922F1
1116VXP-DMT Host	1179925F1
Cables*	
Power	
DC Power (20 ft cable)	1179810G2
Span Power (MS2 Connectors) (20 ft cable)	1179814G2
Span Power (710 Connectors) (20 ft cable)	1179814G4
Span Power (MS2, CAT5 Power/DMT) (5 ft cable)	1179817F2
Span Power (710, CAT5 Power/DMT) (5 ft cable)	1179817F1
Alarm Input (10 ft cable)	11798101G5

\*Additional cable lengths available for quote. Please call 800-888-4ADTRAN for pre-sales support.



**ADTRAN, Inc.**  
901 Explorer Boulevard  
Huntsville, AL 35806  
256 963-8000

**General Information**  
800 9ADTRAN  
www.adtran.com/contactus

**Canada Headquarters—  
Toronto, Ontario**  
+1 877 923 8726  
+1 905 625 2515  
sales.canada@adtran.com

**Canada—Montreal, Quebec**  
+1 877 923 8726  
+1 514 940 2888  
sales.canada@adtran.com

**Mexico and Central America**  
+1 256 963 3321  
+1 52 55 5280 0265 Mexico  
sales.cala@adtran.com

**South America**  
+1 256 963 3185  
sales.brazil@adtran.com  
sales.latam@adtran.com

### 61179922F1-8A

October Copyright © 2017 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty)

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense)



ISO 9001  
ISO 14001  
TL 9000



TL 19 1270