



ADTRAN

9504N

Environmentally-Hardened 10G-EPON Remote OLT (with DPoE)



Benefits

- Cuts head end space congestion, power consumption and fiber exhaust issues
- Supports Gigabit speeds and subscriber capacity via remote, non-blocking FTTH architecture
- Up to 512 FTTH subscribers supported via 4-ports of 10G-EPON
- Purpose built to support gigabit broadband and SLA-based multi-gig business and backhaul services
- Supports low-latency services such as emerging augmented and virtual reality applications
- Expedites OSS/IT on-boarding to fully-featured Cable Labs DPoE 1.0 and 2.0 compliant systems
- Aligned with Distributed Access Architectures (DAA) and Fiber Deep strategies (up to 80km)
- Robust outside plant design with strand mounting and environmentally sealed packaging
- Fully redundant power supplies and uplink connections

Overview

The ADTRAN® 9504N is a strand mount OLT designed to be attached to messenger strands to optimize Cable MSO networks with short drops and high split counts. Built on the latest Layer 3 switch platform with built-in DOCSIS Provisioning over EPON (DPoE) technology, it is a cost-efficient solution for PON-based access networks, optimized for reliable triple-play service and beyond.

The ADTRAN 9504N compact, environmentally-hardened Remote OLT, with built in traffic management features, handles both present and future requirements. As a scalable EPON OLT with DPoE, the 9504N allows network operators to control costs and capacity with a “pay as you grow” platform. The 9504N provides convenient system operation and maintenance via:

- Layer-2 switching
- Layer-3 routing
- Quality of Service (QoS)
- Operations, Administration, and Maintenance (OAM)
- Security features

The 9504N’s environmentally hardened, clam-shell form-factor can withstand extreme weather conditions and provide reliable broadband connectivity.

9504N

Product Specifications

System Features

- 4x 10GE/1GE uplink SFP+ ports
- 4x 1G/1G EPON XFP ports
- Full-duplex switching capacity: 160 Gbps
- System throughput: 53.7 Mpps
- Management interfaces: RS-232C, 10/100/1000BASE-T

Mechanical

- 15 x 10 x 9 in. (393 x 262 x 248 mm) (W x H x D)
- Maximum Weight: 48.3 lbs (21.9 kg)

Electrical Power Specification

- Maximum power consumption: 129 W, 440 BTU
- Rated input voltage: 60 - 90 VAC, 50 - 60 Hz

Environmental

- Operating Temperature: -40°C to 65°C
- Humidity: 5 – 95%

DPoE

- Max 16 bidirectional unicast LLID per 10G ONU
- Max 1K bidirectional unicast LLID per OLT port
- Wire-speed processing
- 10 Gbps/10 Gbps symmetric rate (downstream/upstream)
- 10 Gbps/1 Gbps asymmetric rate (downstream/upstream)
- 128-bit Advanced Encryption Standard (AES) encryption engine for PON security and privacy with up to 128 unique keys.
- AES-128 bidirectional encryption
- Forward Error Correction (FEC) encoding and decoding
- Flexible optical transceiver interfaces for multiple vendor support
- Hardware-based configurable Dynamic Bandwidth Allocation (DBA)
- IEEE 802.1D bridging: 8K MAC Address learning and aging on local interface
- IEEE 802.1p with four priority queues
- IEEE 802.1Q VLAN mapping
- Supports local and remote loopback test, IPDR, lawful intercept, and MEF services
- DPoE 2.0 features including IPv6, multicast, MPLS, IP-SG with sub-bundle interfaces and L2-HSD support

Layer 2

- MAC address: up to 32K (shared) MAC management
- VLAN
 - Max 4 K VLANs, 802.1Q support
 - 802.1ad Q-in-Q
 - Tagging/stacking
 - Port to VLAN mapping
 - Service to VLAN mapping
- Link aggregation
 - 802.3ad link aggregation
 - Load-balancing based on source and destination MAC/IP
- Spanning Tree
 - 802.1d Spanning Tree Protocol (STP)
 - 802.1w Rapid STP (RSTP)
 - 802.1s Multiple STP (MSTP)

Security

- Packet Filtering
 - NetBIOS, NBT filtering
 - DHCP filtering
 - Packet filtering with ACLs
 - EtherType VLAN ID
 - Destination/source IP address

Layer 3

- Routing
 - Static routing
 - RIPv2 (IPv4), RIPng (IPv6)
 - OSPFv2 (IPv4) / v3 (IPv6)
 - IS-IS
 - BGP4 (IPv4) / 4+ (IPv6),
 - VRRPv2 (IPv4) / v3
 - Policy Based Routing (PBR) ECMP max 8 routes: restricted by software—Max 16 K routing entries
- Multicast
 - PIM-SM, PIM-SSM
 - IGMP v2/v3
 - Max. 1K (IPMC) group support ,
 - IGMP snooping , IGMP join/leave, PIM-ECMP support, IGMP join filter/count limit
- DHCP
 - DHCP Relay, Blocks illegal IP users, DHCP option 82, DHCP Snooping, DAI (Dynamic ARP Inspection)

10G-EPON Remote OLT (with DPOE)

Quality of Service


- Layer 2: source/destination MAC address, VLAN ID, COS field
- Layer 3: source/destination IP address, DSCP
- Layer 4: source/destination TCP/UDP port
- TCP control flag
- Marking/remarking: DSCP, 802.1p
- Packet drop
- Mirroring to port, redirect to port
- Metering, rate limiting with 1 Mbps unit
- 8 queues per port
- SPQ, DWRR, hybrid (SPQ+DWRR)
- Egress rate shaping per port/queue with 1 Mbps unit
- Abnormal traffic blocking
 - Block the illegal source MAC address
 - ALL 0's, 1's, system Mac, default G/W Mac
 - Block the illegal source IP address storming control
 - Broadcast, DLF, multicast packet rate control
 - Cut-off of illegal traffic per source MAC
- IP anti-spoofing
- ARP packet traffic limit
- Blocking of user-to-user flows
- Subscriber isolation
- MAC address anti spoofing
- User protection: ARP spoofing/ARP cache poisoning—IP spoofing, DHCP spoofing, broadcast flooding, MAC address spoofing, MAC flooding, 802.1Q tagging

System Security

- Access control: RADIUS; TACACS+; Telnet, SNMP with ACL; DHCP, DHCP 82/60 options, PPPoE (option 105) and static IP
- Protection
 - CPU packet filtering with ACL
 - CPU overload packet traffic sender block
 - TCP sync attack protection with sync cookies
 - CPU packet rate-limit

Management

- Remote access
 - Telnet, SSH, SNMP v1/v2/v3
- OS/configuration
 - Remote OS upgrade using TFTP, FTP
 - Dual flash image
 - Remote configuration data download
- Others
 - NTP
 - Packet monitoring with TCPDUMP
 - RMON, syslog
 - Type-based port, CPU packet statistics

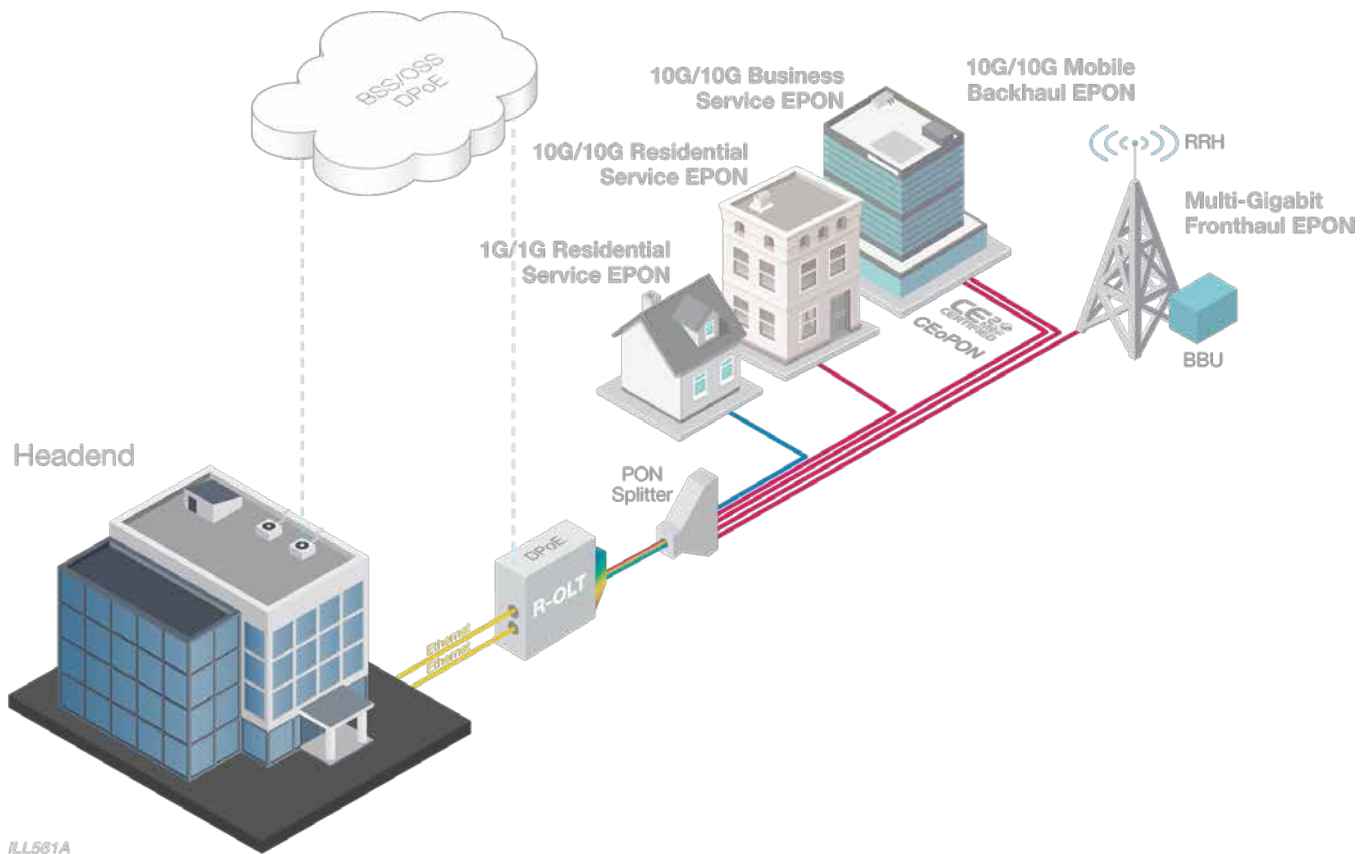

ILL581A

Ordering Information

Equipment	Part No.
ADTRAN 9504N Environmentally-Hardened 10G-EPON Remote OLT (with DPoE)	1759504NF1



ADTRAN, Inc.
901 Explorer Boulevard
Huntsville, AL 35806

General Information
+1 256 963 8000
www.adtran.com/contactus

Headquarters – EMEA
ADTRAN GmbH
Erika-Mann-Str. 25
80636 Munich-Germany
+49 89 411097 111
sales.europe@adtran.com

Central-/East and West Europe
+49 89 411097 111
sales.cewe@adtran.com

South Europe
+49 89 411097 111
sales.southeurope@adtran.com

North Europe and CIS
+49 89 411097 111
sales.ne@adtran.com

Middle East and Africa
+49 89 411097 111
sales.mea@adtran.com

Asia
+852 3187 7111
sales.asia@adtran.com

Australia/New Zealand
+61 3 9658 0500
sales.australia@adtran.com

I61759504NF1-8A

October Copyright © 2017 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and Total Access are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit www.adtran.com/exportlicense

ADTRAN
Certified
Supplier



ISO 9001
ISO 14001
TL 9000



TL 9000
TL 9000 1270