

ADTRAN

# FSU7100 SERIES

## Multi-Gigabit Optical Platform



### Benefits


- **Simultaneously Supports 1G/10G Line Cards**
- **1G/10G ONU Coexistence on 10G PON**
- **160G Uplink Capacity**
- **DPoE 1.0 Qualified**
- **MEF 9 and 14 Certified**
- **Investment Protection**
  - Up to two 80Gbps Per PON Slot (for Redundancy)
  - Up to 2.56Tbps Backplane Capacity
  - Redundant 100 Mbps Control Channels
  - Upgradeable Switching Modules
  - Dual Function Slot Design Supports Use of Multipurpose Line Cards
- **High Throughput and Reliability**
  - 128 1G or 10G-EPON Interfaces
  - 160 Gbps Uplink (10 Gbps x 8 Ports x 2 Switch Cards)
  - L2/L3 Capable
  - Upgrade Path to Higher Switching and Uplink Capacities

### Overview

The FSU7100 Series Optical Platform supports the delivery of symmetrical multi-gigabit (1G/10G) Ethernet services. It can be utilised as an integrated, modular or hybrid optical access platform.

It supports IEEE802.3ah/av standards compliant EPON/10G-EPON modules while supporting both DOCSIS (DPoE) and manual (CLI) provisioning methods.

The ADTRAN FSU7100 series consists of the FSU7101 OLT and the FSU7104 Compact OLT. The FSU7101 provides up to 128 10G-EPON ports to support up to 16,384 Optical Network Units (ONUs) making it ideal for headend or hubsite deployments. The FSU7104 Compact OLT provides up to 24 10G-EPON ports to support up to 3,072 ONUs and is designed for use in small hubs, indoor cabinets, and multi-dwelling units (MDUs).

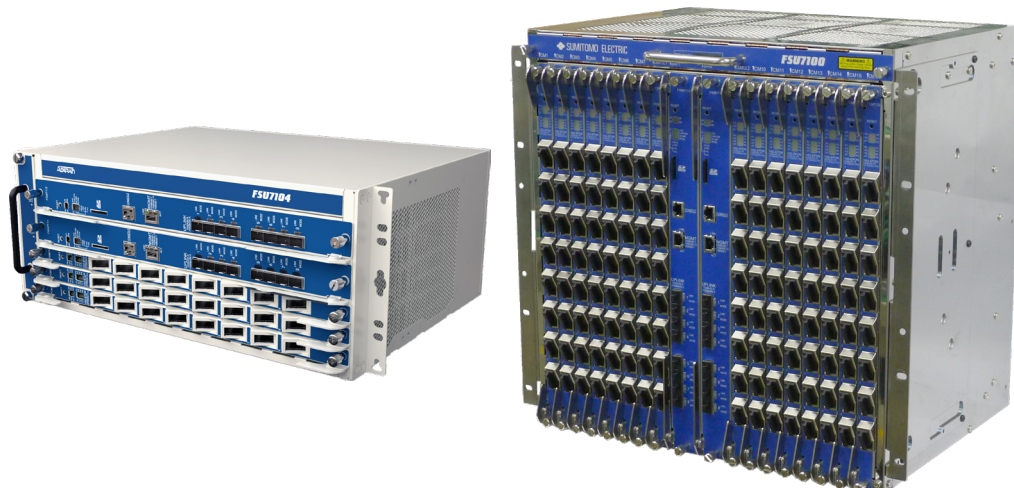

# ADTRAN FSU7100 SERIES

---

## Product Specifications

### Chassis (FSU7101)

- **Dimensions:** 444mm x 434mm x 334mm (17.5 in. x 17.1 in. x 13.2 in.) (H x W x D)
- **Weight:** 45kg (~100lb)
- **Height:** 19-inch, 10RU (excluding air baffles)
- **Mount:** Flush or Middle
- **Input Voltage:** -42V DC to -57V DC
- **Power Consumption:** 3kW Max
- **Operating Temperature:** 0°C-40°C (32°F-104°F)
- **Operating Humidity:** 10 ~ 90% RH (non-condensing)
- **Number of Line Card Slots:** 16

### Chassis (FSU7104)

- **Dimensions:** (177mm x 440.7mm x 386.6mm) 6.7 in. x 17.35 in. x 15.22 in (H x W x D)
- **Weight:** 17.4 lbs (7.9 kg)
- **Height:** 19-inch, 4RU
- **Mount:** Front or Middle
- **Input Voltage:** -42V DC to -57V DC
- **Power Consumption:** 1440W Max
- **Operating Temperature:** 32°F-104°F (0°C-40°C)
- **Operating Humidity:** Up to 93% (non-condensing)
- **Number of Line Card Slots:** 3

### Switch Card (FSW7112)

- **Remote Access:** I/F RJ-45 10/100/1000BASE-T x 1 (auto negotiation)
- **Serial Interface:** RJ-45 (RS232C) x 1
- **Uplink Interface:** SFP/SFP+ (1000B/10GBASE-SR/LR) x 8
- **Uplink Capacity:** 160G (Active/Active)
- **SD Card Slot:** SDHC
- **Number of Supported Line Cards:** Maximum 16

### 10G Line Card (FCM7133)

- **Line Rates:** 1/1G; 10/1G; 10/10G PON I/F; XFP x 8, 10GBASE-PR-D3, 10/1GBASE-PRX-D3, 1000BASE-PX30-D
- **Wavelength:** Upstream 1260 ~ 1280nm/Downstream 1575 ~ 1580nm
- **Transmission Rate:** 10.3 Gbps
- **Bandwidth Control:** Dynamic Bandwidth Allocation
- **Maximum Number of ONUs:** 128 Per Port

### Certificates

- EMI FCC Part15 Class A, ICES-003 Class A
- Safety UL/CSA 60950-1, IEC 60950-1 & 60825-1
- MEF 9 and 14
- DPOE 1.0 Qualified

### Management

- SNMPv1/v2c/v3
- CLI (SSH/Telnet)
- TFTP/SFTP client
- Syslog
- SNTP client
- RADIUS/TACACS+ AAA client
- L2/L3/L4 based ACL
- Remote Firmware upgrade (OLT & ONU)
- Remote ONU Control

# Multi-Gigabit Optical Platform

---

## Routing

- ECMP
- Static IPv4/6 Routing
- IPv4
  - ♦ IPv4/31 Bit Mask Interface Addressing
  - ♦ RIPv2, OSPFv2; BGPv2
- IPv6
  - ♦ M-ISIS, Single Topology ISIS, BGPv6
- DHCP Relay Agent (Option82)

## L2 Switching

- Link Aggregation (LAG) with LACP (802.3ad)
- DPoE 1.0 Compliant EPL Service with Provider Bridging (Q in Q)
- ELINE/ELAN

## QoS

- DBA of EPON (Hierarchical Weighted Round Robin)
- Eight Priority Queues for Each Line Card and Uplink Port
- Policing with Two Rate Triple Colour Markers (trTCM)

## DPoE/EPON

- Maximum 128 ONUs Per PON with FCM7133 Line Card
  - ♦ Maximum 16 LLIDs Per ONU
- 1G - 8 LLIDs Per ONU
- 10G - 16 LLIDs Per ONU

## Security

- PON Encryption (AES128 CFB mode)
- ONU Authentication
- Secure Software Download (SSD) via DOCSIS

## Diagnostic

- Statistics counters
- Ping and Traceroute
- ONU Loopback
- Optical Monitoring
- Optical Shutdown

# ADTRAN FSU7100 SERIES

## Ordering Information

Equipment	Part No.
ADTRAN FSU7101 Optical Platform	4757101FSUDCF1
ADTRAN FSU7104 Compact OLT	4757104FSUDCF1
Switch Card FSW7112	1757112FSWF2
10G Line Card FCM7133	1757133FCMF1



**ADTRAN, Inc.**  
901 Explorer Boulevard  
Huntsville, AL 35806

**General Information**  
+1 256 963 8000  
[www.adtran.com/contactus](http://www.adtran.com/contactus)

**Headquarters – EMEA**  
**ADTRAN GmbH**  
[sales.cewe@adtran.com](mailto:sales.cewe@adtran.com)

**South Europe**  
[sales.southeurope@adtran.com](mailto:sales.southeurope@adtran.com)

**Middle East and Africa**  
[sales.mea@adtran.com](mailto:sales.mea@adtran.com)

**Australia/New Zealand**  
[sales.australia@adtran.com](mailto:sales.australia@adtran.com)

### I6475710xFSUDCF1-8A

August Copyright © 2019 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN® and the other trademarks listed at [www.adtran.com/trademarks](http://www.adtran.com/trademarks) are registered trademarks of ADTRAN, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty).

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding exportation of ADTRAN items (e.g. commodities, technology, software), please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense).

ADTRAN  
Certified  
Supplier

ISO 9001  
ISO 14001  
TL 9000



TL9000  
TL 10 1270